



W22

SERIES

SPECIFICATION DATA SHEET



2003/01/07 00:02
P/No. ABC123
Total 5399.8 kg
T.N.W. 5399.8 kg
Tare 0.0 kg
T.G.W. 5399.8 kg

2003/01/07 00:02
P/No. ABC123
SER. 3
N.W. 1800.0 kg
Tare 0.0 kg
G.W. 1800.0 kg

2003-01-13 17:51
P/No. ABC123
Max: 3200.0
Min: 1200.0
1000.0 L
02
4000.0 H
04
1000.0 L
04
1000.0 L
05
3000.0 G
05
1000.0 L
07
1000.0 L
07
Total 14000.0





W22

THE IDEAL INDICATOR

- Multi-function Indicator which can apply to: Checking Weighing, Truck Scale, and Simple Batching System.
- User Friendly Setup, Calibration and Operation Procedures
- Totally 15 different Printer Formats for Mini-Printer and Thermal Printer.
- Programmable Computer and Printer Output Transmission and Data Format
- 5 Points Linear Correction System to prevent linear error from the load cell.
- Built-in Digital Filter System to Prevent Environment Interference

FEATURE

- Password Function to Prevent Unauthorized Access
- Maximum Number of Load Cell = 8 x 350 ohm
- Up to 1/30000 Display Resolution
- 1,000,000 Internal Count
- Weighing Unit Selectable: Matrix and Avoirdupois
- Low Battery Warning Signal
- Built-in Backlight
- Built-in Rechargeable Battery
- Built-in RS-232 interface
- Bi-Direction Transfer between PC to Indicator with RS-232.
- HI-LO-OK-ZERO 4 set points.

SPECIFICATION


- Display: 6 digits LCD, 26mm height
- Display Resolution: Maximum of 30,000 counts
- Division: 1, 2, 5, 10, 20, 50 selection
- Input Sensitivity: 0.1uV / division or above
- Zero Adjustable Range: -2 mV ~ 20 mV
- Non-Linearity: +/- 0.0033% F.S.
- A/D Conversion Speed: 50 times / sec
- Maximum Input Voltage: 20 mV
- Load Cell Excitation: DC 5 V (up to 8 x 350Ω load cells)
- Zero Drift: 0.3 uV /°C (typ.)
- Span Drift: +/- 8 PPM /°C (typ.)
- Power supply: By built-in Rechargeable Battery and AC/DC Power Adaptor
- Operating Temperature: 0 ~ 40°C
- Operating Humidity: < 90 % R.H. Non-condensing
- Net Weight: 2.8 kg
- Dimension: 210 (D)X300 (W)X 130 (H) mm

OPTIONS AVAILABLE

- RELAY OUTPUT
- MINI-PRINTER
- UWE OP-5L REMOTE DISPLAY
- UWE OP-5S REMOTE DISPLAY
- PRINTER INTERFACE
- JUNCTION BOX FOR UP TO 8 LOAD CELL
- MOUNTING KIT



unit = mm

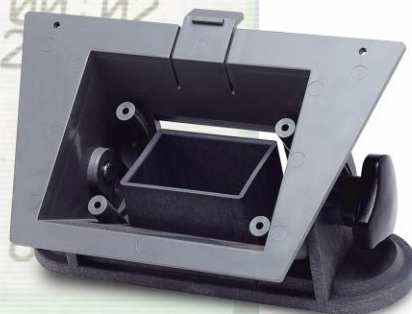

MOUNTING KIT (Option Item)

LOCAL DISTRIBUTOR INFORMATION



UNIVERSAL WEIGHT ENTERPRISE CO., LTD.
<http://www.uwe-scale.com.tw>

May 2005 Designed by DAILY
Printed in Taiwan